

LYRA EVO



IP40

IK08

Code **LV32N30ABR**




Luminaire description

- LYRA EVO 3H MAINTAINED IP40 32M REST MODE


Technical characteristics

- Test button
- Function: Rest Mode (Self-contained with rest mode)
- Type: M (Maintained)
- Power supply: 230Vac 50-60Hz
- Duration: 3h
- Battery: Ni-Cd 4,8V 0,5Ah
- Battery type: Nickel Cadmium
- Recharge time: 12h
- Insulation class: II
- IP protection degree: IP40
- IK protection degree: IK08
- Working temperature: 0 / +40°C
- Colour: Grey
- Signaling visibility (EN 1838): 32m
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 1838, EN 7010
- Free from photobiological risk according to EN 62471
- Kit of pictograms included
- Installation: wall, ceiling, suspension, false ceiling, flag-style

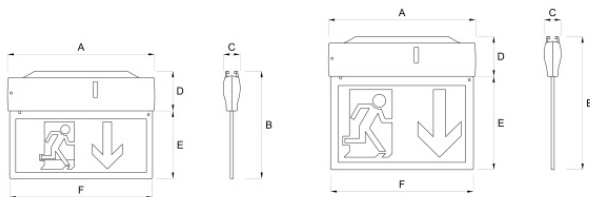

VISIBILITÀ 22m: A=289mm B=211mm C=34mm
D=77mm E=134mm F=280mm

VISIBILITÀ 32m: A=289mm B=261mm C=34mm
D=77mm E=185mm F=280mm

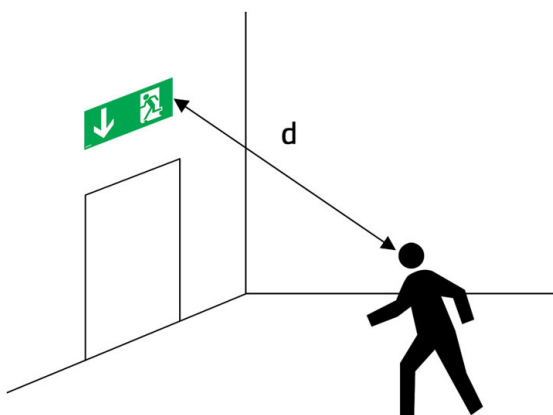

Signaling visibility: 32 metri



An UNI EN ISO 9001:2008 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 04/16-1