

### PRODIGY




IP65

Code **PS24F30EBR**


Short code **PS1203**



MODELLO DEPOSITATO / PATENTED DESIGN

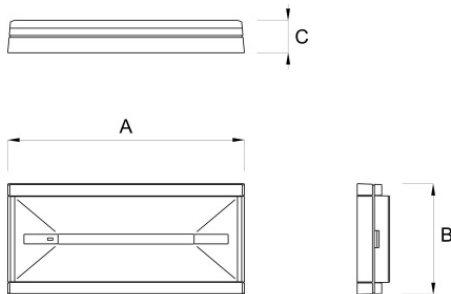

A=243mm B=114mm C=33mm

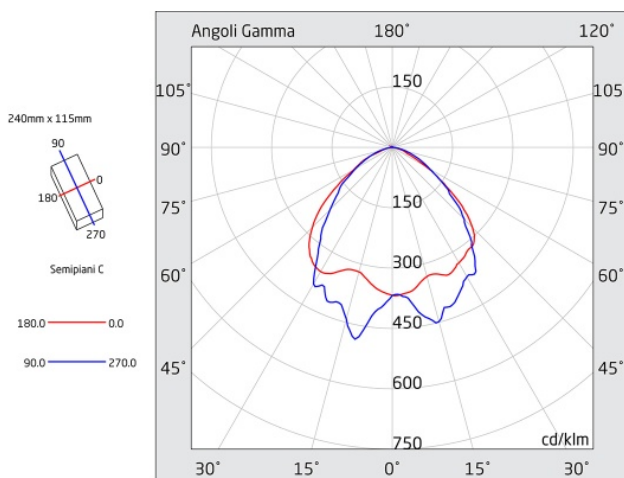

### Luminaire description

- PRODIGY 24W 20LED 3H NOT MAINTAINED IP65 REST MODE

### Technical characteristics

- Function: Rest Mode (Self-contained with rest mode)
- Duration: 3h
- Type: N/M (Non Maintained)
- Medium flux in emergency: 270lm
- Minimum flux in emergency (according to EN 60598-2-22): 255lm
- Battery: Li-FePO4 3,2V 3Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Power supply: 230Vac 50-60Hz
- Insulation class: II
- IP protection degree: IP65
- Working temperature: +5°C to +40°C
- Colour: White
- Signaling visibility with pictogram (EN 1838): 17 m
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS 2011/65/UE
- Glow wire 850 °C
- Installation: wall, ceiling, wall recessed box\*, drywall recessed\*, false-ceiling recessed\*, flag-style\*, busbar\*, 45° bracket\* (\* with accessory)
- 5 year warranty (please read the Warranty terms)

### Lamp characteristics

- Type: LED
- Lamps: 20 LED
- Comparable to: 24W
- Colour temperature: 6000K



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 10/17-1